
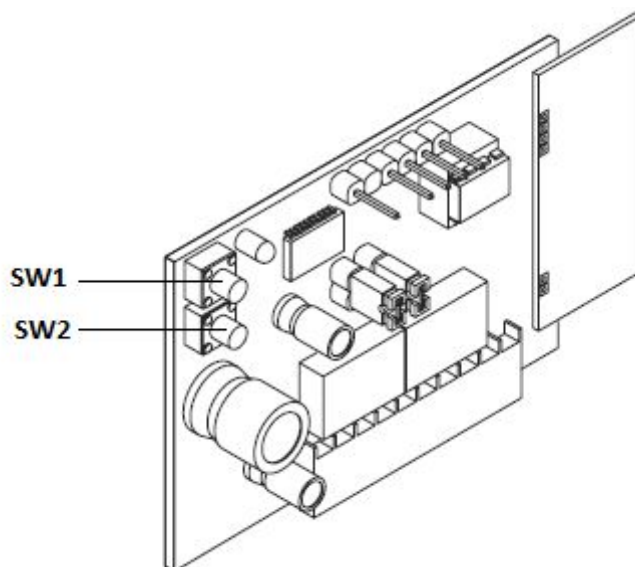


Programming Manual

SL-PRO
montage team

BFT Clonix 2E

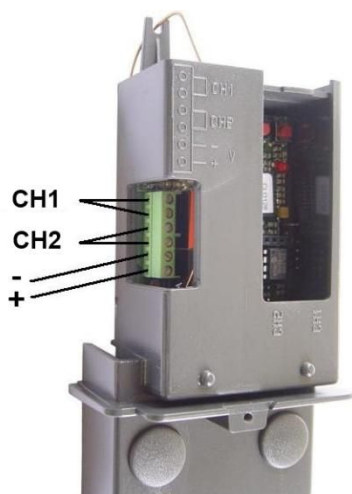

Assembly of your receiver

1. Open the casing of your receiver.
2. On the receiver circuit board, press the SW1 button. Let it go. The Led light of the receiver blinks.
3. Press both buttons on your new remote control (both superior buttons if your remote control has 4 buttons) until the LED light of the receiver illuminates fixedly.
4. Press the first button on your new remote control until the LED light of the receiver blinks again.
5. The Led light of the receiver turns off.
6. The first button of your new remote control is programmed.
7. Repeat this procedure to program the second button of your new remote control. Use this time the SW2 button on the circuit board of the receiver.